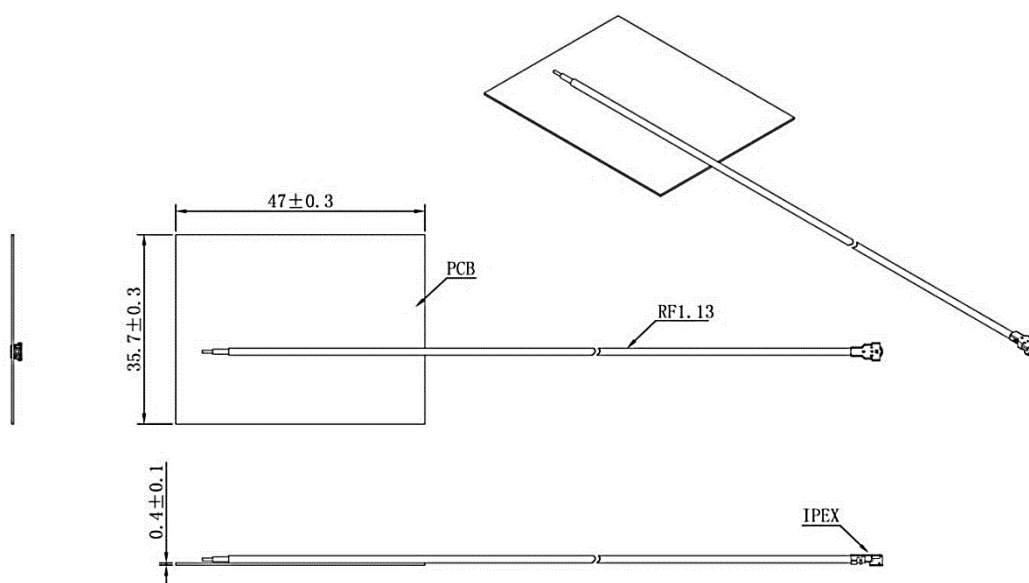


RCPX-2441.75-5362.5-O-B

Specifications

Parameters	Value	Unit
Frequency Range	2400 ~ 2483.5 4900 ~ 5825	MHz
Polarization	Linear	-
Gain (Zenith)	3	dBi
VSWR, max	2	-
Impedance	50	Ω
PCB Dimension	47 x 35.7 x 0.4	mm
Connector	IPEX	-
Cable	RF1.13	-
Mounting Method	Embedded or Adhesive	-
Vibration (with 1.5mm amplitude 2 hours)	10 ~ 55	Hz
Operating Temperature Range	-40 ~ +85	°C
Environmentally Friendly	RoHS Compliant	-

**Dimensions**

Unit:mm

APPROVAL

DRAWN BY	KW, 09/05/2019
APPROVED BY	AR
REVISION	A, Initial Release